

# UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
L741.00101

Total Pages in this Submission

## TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**DATA PROCESSING SYSTEM FOR APPLICATION TO ACCESS BY ACCREDITATION**

and invented by:

Yves AUDEBERT

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

### Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 16 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Small Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
L741.00101

Total Pages in this Submission

**Application Elements (Continued)**

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal      b. ☐ Informal      Number of Sheets 7
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy)      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche
7. ☐ Genetic Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☒ Assignment Papers (cover sheet & documents)
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449      ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class      ☐ Express Mail (Specify Label No.): \_\_\_\_\_

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Small Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
L741.00101

Total Pages in this Submission

**Accompanying Application Parts (Continued)**

15. ☒ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*
16. ☒ Small Entity Statement(s) - Specify Number of Statements Submitted: 1
17. ☐ Additional Enclosures *(please identify below)*:

**Request That Application Not Be Published Pursuant To 35 U.S.C. 122(b)(2)**

18. ☐ Pursuant to 35 U.S.C. 122(b)(2), Applicant hereby requests that this patent application not be published pursuant to 35 U.S.C. 122(b)(1). Applicant hereby certifies that the invention disclosed in this application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication of applications 18 months after filing of the application.

**Warning**

*An applicant who makes a request not to publish, but who subsequently files in a foreign country or under a multilateral international agreement specified in 35 U.S.C. 122(b)(2)(B)(i), must notify the Director of such filing not later than 45 days after the date of the filing of such foreign or international application. A failure of the applicant to provide such notice within the prescribed period shall result in the application being regarded as abandoned, unless it is shown to the satisfaction of the Director that the delay in submitting the notice was unintentional.*

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Small Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
L741.00101

Total Pages in this Submission


**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	12	- 20 =	0	x \$9.00	\$0.00
Indep. Claims	1	- 3 =	0	x \$40.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
<b>BASIC FEE</b>					\$355.00
<b>OTHER FEE (specify purpose)</b> US PTO Assignment Recording Fee					\$40.00
<b>TOTAL FILING FEE</b>					\$395.00

- ☒ A check in the amount of \$395.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-4375 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☐ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: November 28, 2000

  
Signature

James E. Ledbetter, Esq.  
Registration No. 28,732  
Stevens, Davis, Miller and Mosher, LLP  
1615 L Street, N.W., Suite 850  
Washington, DC 20036  
Tel: 202-408-5100  
Fax: 202-408-5200

CC:

Applicant or Patentee: \_\_\_\_\_ Attorney's  
Serial or Patent No.: \_\_\_\_\_ Docket No.: \_\_\_\_\_  
Filed or Issued: \_\_\_\_\_  
For: "Data processing system for application to access by accreditation".

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY  
STATUS (37 CFR 1.9(f) AND 1.27(c)) - SMALL BUSINESS CONCERN

I hereby declare that I am

- ☐ the owner of the small business concern identified below:  
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF CONCERN ACTIVCARD  
ADDRESS OF 24-28 avenue du Général de Gaulle - 92156 SURESNES CEDEX - FRANCE

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled "Data processing system for application to access by accreditation", by inventor(s) Yves AUDEBERT described in \_\_\_\_\_

- ☒ the specification filed herewith  
☐ application serial no. \_\_\_\_\_, filed \_\_\_\_\_  
☐ patent no. \_\_\_\_\_, issued \_\_\_\_\_.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e). NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities.  
(37 CFR 1.27)

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

☐ INDIVIDUAL      ☐ SMALL BUSINESS CONCERN      ☐ NONPROFIT ORGANIZATION

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

☐ INDIVIDUAL      ☐ SMALL BUSINESS CONCERN      ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING \_\_\_\_\_

YVES AUDERERT

TITLE OF PERSON OTHER THAN OWNER \_\_\_\_\_

VICE-CHAIRMAN X C.O.O.

ADDRESS OF PERSON SIGNING \_\_\_\_\_

237 FORRESTER ROAD, LOS GATOS CA 95032

SIGNATURE \_\_\_\_\_

Yves Auderert

DATE \_\_\_\_\_

10/16/2000

A0000042.DOC

## **DATA PROCESSING SYSTEM FOR APPLICATION TO ACCESS BY ACCREDITATION**

### **BACKGROUND OF THE INVENTION**

#### **Field of the Invention**

The invention relates to improvements to data processing systems in which access of a user to one or more programs, for example applications, is controlled by one or more credentials.

#### **Description of the Prior Art**

The security of a data processing system, and in particular the security of access to programs such as operating systems or applications (home banking, e-commerce, etc.), is based on authentication of the user by means of static credentials which usually consist of a name assigned to the user (their "login name") and a static password.

In the remainder of this document the expression "data processing system" means any system comprising a personal computer, a telephone, a mobile telephone, or a personal digital assistant, etc. enabling a user to execute either a local application or the client part of an application, for example in the context of a client-server architecture.

Authentication protocols based on a user knowing a static password are known in the art:

- basic authentication: the password is transmitted in clear to a server-end authentication module;

- encrypted password: a session key is transmitted using a public key algorithm (for example a DIFFIE-HELLMAN algorithm), which enables a secure channel to be set up between two entities via which the password is transmitted, without it being necessary for those entities to share a secret password between them beforehand;

- digest authentication: the client part of the application encrypts the password (or a digest of the password) using a challenge sent by the server-end authentication module;

- Kerberos: the credentials are transmitted to the user by the server-end authentication module, encrypted using the user's password, so that only the user can use the credentials.

However, static passwords are vulnerable in a number of ways, because they can be divulged (if knowledge of the password is gained legitimately or fraudulently by a third person), broken if they are weak (passwords used repetitively without modification, short passwords, dictionary attack), discovered by tapping a communication line or emulating an authentication server, or replayed by reproducing an authentication sequence.

To remedy the above drawbacks it is known in the art to use other mechanisms which are more secure than static passwords.

A first solution known in the art consists of using dynamic passwords, i.e. passwords which are modified each time they are used. Dynamic passwords can be synchronous (modified synchronously at the user end and at the server-end, for example as a function of the time and/or the number of uses) or asynchronous (on each access request the server-end authentication module generates a different random challenge which is transmitted to the user end to generate the dynamic password by means of an appropriate algorithm). In either case (synchronous or asynchronous passwords), secret keys are shared at the server-end and the user end. At the user end, the dynamic passwords can be generated by a personal security device (PSD) such as a smart card, a secure portable electronic device ("token"), etc.

Another solution uses public key cryptographic systems, the user holding a private key and the public key being certified by a certification authority. An authentication sequence using a system of this kind can proceed as follows:

- the user transmits a certificate (containing their login name, public key, address, etc.) to the server;
- on receiving the certificate, the authentication module of the server generates a challenge and sends it to the user;
- the user signs the challenge using their private key; and
- the authentication module verifies the signed challenge using the public key and authenticates the user if there is a match.

Solutions based on a dynamic password or public key replace authentication mechanisms based on a static password or call on an external authentication server.



It is also known in the art to use a single sign on (SSO) server (password server) by means of which, through a single authentication and authorization process, a user can access all computers and systems they are authorized to access without having to enter many different passwords. Once they have been authenticated, by an authentication process employing a strong password (a password including a large number of characters), the user can request the password server to execute an application. The password server then loads into the user's terminal a set of data including the user's credentials for the requested application, enabling the terminal to start running the application. However, this solution requires a specific authentication (SSO) server and is still based on a first authentication of the user vis-à-vis that server on the basis of a static password.

### OBJECTS AND SUMMARY OF THE INVENTION

The invention aims to improve the security of mechanisms by which, using static credentials (login name, password, etc.), users at a terminal can authenticate themselves vis-à-vis a program executed either locally in that terminal or partly in the terminal and partly in a server to which it is connected.

Another object of the invention is to provide a data processing system including improved mechanisms for controlling access to one or more applications in which the authentication protocol based on sharing of static and secret credentials between the customer end and the server-end of an application is not modified and the authentication module of the server-end application remains the same.

To this end, the invention provides a data processing system for executing at least one program to which access by a user is controlled by the provision of credentials assigned to said user, said system including:

- at least one terminal including data processing means for executing at least part of said program,
- first memory means associated with said program for storing at least first credentials specific to said user, and
- access control means for authorizing access to said program in response to a match between said first credentials stored in said first memory means and second credentials applied via said terminal to said program,
- at least one security device personal to said user, associated with said terminal and including second memory means for secure storage of said second credentials,

- said terminal including at least some of credentials management means (CMP) including:

- means for reading and transmitting credentials to read said second credentials stored in said second memory means and transmit them to said access control means in response to presentation of a request to access said program, and
- credentials updating means for selectively commanding the generation and loading into said first and second memory means of new credentials replacing said first and second credentials previously stored.

Other features and advantages of the invention will be apparent to those skilled in the art from a reading of the following brief description of the drawings, the detailed description of the invention, and the appended claims.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a general block diagram of a data processing system constituting a first embodiment of the invention in the case of an application executed partly in a terminal and partly in a server;

Figure 2 is a block diagram of a first embodiment of the data processing system shown in Figure 1;

Figure 3 is a flowchart showing a first mode of updating credentials in the data processing system shown in Figure 2;

Figure 4 is a flowchart showing a second mode of updating credentials in the data processing system shown in Figure 2;

Figure 5 shows a second embodiment of the data processing system shown in Figure 1;

Figure 6 shows one mode of updating credentials in the data processing system shown in Figure 5;

Figure 7 shows a third embodiment of the data processing system shown in Figure 1;

Figure 8 shows a fourth embodiment of the data processing system shown in Figure 1;

Figure 9 shows a data processing system constituting a second embodiment of the invention in which one or more applications are executed locally in a terminal; and

Figure 10 shows one mode of updating credentials in the data processing system shown in Figure 9.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figure 1, the data processing system shown comprises a terminal T which is connected to a personal security device PSD and to an information system I via a network R. The personal security device PSD is linked to the terminal T by means L providing bidirectional transmission of information between them.

Examples of the terminal T include a personal computer, a telephone, a mobile telephone, a personal digital assistant, etc. It is conventionally provided with user interface means, data processing means (microprocessor) and appropriate memories (not shown). By means of appropriate programs ACC1, ACC2, ACCN, the terminal T is capable of executing applications A1, A2, ..., An when linked via the network R to servers S<sub>1</sub>, S<sub>2</sub>, ..., S<sub>n</sub> containing respective programs ACS<sub>1</sub>, ACS<sub>2</sub>, ..., ACS<sub>n</sub>. Of course, in contradistinction to what is shown in the figure, each server S<sub>1</sub>, S<sub>2</sub>, ..., S<sub>n</sub> of the information system I could use a plurality of applications. To summarize, the software of each application is divided between the terminal T and one of the servers of the information system I: the application A1 comprises the software ACC1 and the software ACS<sub>1</sub>, the application A2 comprises the software ACC2 and the software ACS<sub>2</sub>, and the application An comprises the software ACCN and the software ACS<sub>N</sub>.

The network R providing bidirectional transmission of data between the terminal T and the servers S<sub>1</sub>, S<sub>2</sub>, ..., S<sub>n</sub> of the information system I can be of any kind, for example the Internet.

In the context of this application, a personal security device PSD is a device held exclusively by and/or accessible exclusively to a user who is duly authorized (for example by means of a personal identification number PIN or otherwise) and enabling the secure storage therein of data with guaranteed security against reading and/or writing of data by an unauthorized person.

For example, the device can be a smart card, an electrically powered portable electronic device (token) including a limited number of input and output ports

and software and hardware protection means barring access to the internal buses on which the data travels in the device. In the case of a smart card, for example, the means L providing the link to the terminal T comprise a smart card reader which can be integrated into the terminal T or external to it.

As an alternative to this, the personal security device can take the form of software installed in the terminal T and enabling secure storage of optionally encrypted data in the terminal. This embodiment does not offer the same level of security as a smart card, but nevertheless represents a significant improvement in that the credentials of the user can be modified automatically, and therefore frequently. This is explained further below.

The personal security device PSD includes a memory M which stores credentials specific to the user of the terminal T and enabling that user to use the applications A1, A2, ..., An. The credentials assigned to the user comprise a login name and a password specific to the application concerned, for example.

At the information system I end, the servers S<sub>1</sub>, S<sub>2</sub>, ..., S<sub>n</sub> include respective files F<sub>1</sub>, F<sub>2</sub>, ..., F<sub>n</sub> storing the credentials of all users authorized to access an application implemented by the server concerned. Thus the credentials of the user of the terminal T are stored in the memory M and the file F<sub>1</sub> for application A1, in the memory M and the file F<sub>2</sub> for application A2, and in the memory M and the file F<sub>N</sub> for application An.

Of course, the data processing system shown in Figure 1 can include a plurality of terminals T connected by the network R to the information system I and intended to be used by different users.

To execute an application (home banking, e-commerce, etc.), a user launches the application on their terminal T. Access to the personal security device PSD can be conditional on the entry of a personal identification number PIN by the user via the terminal T. Once the request for access to the device PSD has been accepted, the credentials of the user relating to the application concerned are read in the personal security device PSD and transmitted to the server concerned. The server compares the credentials received from the terminal T with those contained in its credentials file and authorizes execution of the application if they match.

A credential management program CMP is provided for managing credentials for authentication vis-à-vis applications A1, A2, ..., An and for updating

credentials. As described in more detail below, the program CMP is divided between the terminal T and the servers  $S_1, S_2, \dots, S_n$  assigned to the various applications.

For authentication vis-à-vis a given application, the terminal T must read the credentials relating to that application in the personal security device PSD.

To this end, it is possible to replace the standard client-end or terminal-end application with a modified application which manages communications with the device PSD in addition to managing the standard characteristics of the application. This type of implementation corresponds to the embodiment shown in Figure 2.

It is also possible, without modifying the standard client-end or terminal-end application, to use dedicated software to read the credentials in the device PSD and transmit them to the application concerned. Solutions for achieving this include, for example: emulating the keyboard, or sending a message containing the credentials. This second solution corresponds to the embodiments shown in Figures 5, 7 and 8.

Turn now to Figure 2, which for simplicity shows only one server S. In the Figure 2 embodiment, the terminal-end credentials management program takes the form of a modified client-end application  $ACC_M$ . The part  $CMP_C$  of the credentials management program is represented by a circle. The credentials management program  $CMP_S$  at the server S end is also represented by a circle: this program is that which exists as standard in any application for modifying the credentials of users or loading credentials relating to new users. The programs  $CMP_C$  and  $CMP_S$ , which are respectively parts of the programs  $ACC_M$  and ACS, together form the credentials management program CMP shown in Figure 1.

In the Figure 2 embodiment the credentials management program integrated into the application A have direct access to the personal security device PSD, via the modified client-end program  $ACC_M$ , and to the credentials file F of the server S.

To enable a user running application A to benefit from an improvement in the security of the authentication process, a security administrator supplies the user with a device PSD containing no credentials. The device PSD does not contain any static password.

The user connects their device PSD to their terminal T and initializes a personal identification number PIN in the terminal.

The user then installs the modified client-end application  $ACC_M$  instead of the standard client-end application previously used.

The first time the program  $ACC_M$  is used to access the application, the user enters their personal identification number PIN to authorize access to the device PSD and then opens access to the application by means of the static credentials known to the user and previously used with their standard client-end application. The current  
5 credentials are presented to the server-end application ACS using the standard authentication protocol.

Once the server-end application has been opened, the part  $CMP_C$  of the client-end application  $ACC_M$  generates a random password, presents a change of password request to the server-end software  $CMP_S$ , to which it transmits the new  
10 password, and then loads the static credentials, comprising the password generated in this way and possibly the login name, into the device PSD. The new static password generated is then stored in the file  $F$  and in the memory  $M$  but is not known to the user. This mechanism enables the use of strong passwords, i.e. complex  
15 passwords (words not found in a dictionary, difficult to remember and therefore to guess, etc.) comprising a large number of characters, which offer a much greater resistance to hacking than short passwords which are used in practice when they must be remembered or entered at the keyboard by a user.

The next time the user accesses the application, the user has only to enter their personal identification number PIN via the terminal, the authentication process  
20 then proceeding automatically by reading the credentials in the device PSD and transmitting them via the program  $CMP_C$  to the server-end program  $CMP_S$ . During this authentication process, the credentials are never displayed on the screen of the terminal  $T$  and therefore remain unknown to the user, which strengthens the security of the system.

The static password can then be updated or changed each time the application concerned is accessed, as shown in Figure 3, or periodically, for example  
25 daily, as shown in Figure 4, or at the specific request of the system administrator.

Referring to Figure 3, the user formulates a request to access an application  $X$  at the terminal  $T$  (step 1) and that request is processed by the server  $S$  (step 2).  
30 The user enters their number or personal identification number PIN via the terminal  $T$  (step 3) and it is transmitted to the device PSD, which in step 4 compares the number entered by the user with that stored in the device PSD (5).

If the PIN number entered by the user does not match the stored number (5) the access request is refused (step 6) which causes the server S to abandon the request (step 7).

If the result of the step 4 test is positive, the device PSD reads the credentials (static password) stored in the device for application X (step 8) and the credentials are transmitted via the terminal T to the server S where they are compared (step 9) with the credentials (static password) stored in the file F for the application X and the user concerned (step 10). If the data compared in step 9 does not match, access to the application X is refused (step 11). If the data does match, access to application X is authorized by the server S (step 12) and the terminal T generates new credentials for application X (step 13).

The new credentials (random password) are transmitted to the server S and to the device PSD (steps 14 and 15) where they are respectively stored in the file F and in the memory M. The process terminates with execution of application X at the server S and terminal T, respectively (steps 16 and 17).

Alternatively, as shown in Figure 4, the credentials (static password) can be modified or updated if a predetermined time has elapsed since the last time the password was changed. The process employed is identical to that shown in Figure 3 up to step 12 and for this reason will not be described again.

After step 12, the terminal T initiates a process to change the credentials for application X (step 18), which leads to reading in the device PSD of the date at which the last credentials for application X were stored in the device PSD (step 19). Step 20 checks if a minimum time, for example one day, has elapsed since the last time the credentials were updated. If not, the credentials are not modified and execution of the application in the server S and the terminal T follows directly (steps 21 and 22).

If step 20 determines that the minimum time has elapsed, the terminal T generates new credentials for application X (step 23) which are respectively stored in the file F of the server S and the memory M of the device PSD (steps 24 and 25), with the date of updating stored at least in the memory M of the device PSD.

The embodiment of the invention shown in Figure 5 uses a different implementation of the credentials management program from that shown in Figure 2. At the terminal T end, the credentials management program is part of a Drag-and-Drop application DD which is independent of the terminal-end or client-end application ACC. At the information system I end a credentials management

software module CMS independent of the server-end application ACS manages the file F of credentials associated with the server S. The module CMS can be implemented in the server S or in an independent server. As in Figure 2, it must be understood that implementing the invention does not imply any modification of the hardware or software of the information system I.

The following description assumes that a user of terminal T is already authorized to access an application executed at the terminal end by the client-end application ACC and at the server end by the server-end application ACS. The user is also assumed to be in possession of credentials enabling them to authenticate themselves to the application and open it.

In order to implement the improved security mechanisms according to the invention, the security administrator gives the user a blank device PSD, i.e. a device containing no credentials.

The user then connects their device PSD to their terminal T and installs the application DD in the terminal. The user also initializes the personal identification number PIN controlling access to their personal security device PSD.

The user is asked for the old credentials, which are communicated to the credentials management module CMS by the application DD in order to authenticate the user. New credentials (static password) are generated by the application DD and transmitted to the module CMS which updates the credentials file F either directly or via the program ACS. The new credentials are not known to the user and can include a "strong" static password (see above).

To use the application, the user starts the application DD, enters their personal identification number PIN to enable access to the device PSD and enters into the program ACC the static credentials read by the application DD in the device PSD, for example by means of a Drag-and-Drop operation using the application DD and a mouse. The mechanisms enabling the credentials contained in a personal security device PSD to be entered into an application by means of a Drag-and-Drop operation are described in co-pending US patent application filed by this applicant under the title "Data processing system for application of credentials to a program or a service", which is incorporated herein by reference. When the credentials are loaded into the application they are not shown on the screen of the terminal and remain unknown to the user.



The process for updating or modifying credentials will now be described with reference to the Figure 6 flowchart. This process is executed each time that the user launches the application DD on the terminal T.

- In step 26 the user requests access to the application DD at the terminal T.
- 5 The user enters their personal identification number PIN in step 27 and in step 28 the PIN is compared in the device PSD with the personal identification number PIN stored in it (29). If the two numbers do not match, access is refused (step 30). If the two numbers match, a process for updating the credentials for application X is initiated (step 31). In the module CMS, this process leads to a request for authentication of the user for application X (step 32) and reading of the user's
- 10 credentials for application X currently stored in file F (step 33).

In parallel with this, the process initiated in step 31 leads to reading the credentials of the user for application X in the device PSD (step 34). The credentials are transmitted to the module CMS via the terminal R.

- 15 In step 35 that module compares the data read in the file F in step 33 and the data read in the memory M of the device PSD in step 34. If they do not match authentication vis-à-vis the module CMS is refused (step 36) and the credentials are therefore not modified.

- Otherwise, in the terminal T, the application DD generates new credentials
- 20 for application X (step 37). Those new credentials are stored in the file F via the module CMS (step 38) and in the device PSD (step 39).

- If the device PSD contains credentials relating to more than one application, the part  $CMP_T$  of the application DD then initiates a process for updating the credentials for application Y (step 40). The same process updates the credentials for
- 25 all applications for which the device PSD contains credentials.

Of course, as described with reference to Figure 4, generating new credentials (static password) can be conditional on a predetermined time elapsing from the generation and storage of the credentials currently stored in the device PSD.

- 30 Note that in this second embodiment of the invention connection of the terminal T to the module CMS does not precede access to the application. Access is effected as described with reference to Figure 2, by sending the credentials to the server-end application ACS and, if access to the module CMS to modify the credentials is not possible, for example if the module CMS is implemented on a

server other than the server S, access to the application supported by the server S is nevertheless possible using the unmodified credentials contained in the memory M and the file F. Updating the credentials is merely deferred until a connection with the module CMS can be set up when the application DD is launched some other time.

5 The system according to the invention therefore differs in all respects from the password server systems which require a connection to be set up beforehand from the terminal to the password server to enable access to an application.

Figure 7 shows an embodiment of the invention which differs from that shown in Figure 5 only in respect of the means for initializing and personalizing the system.

10

The system shown in Figure 7 includes a personalizing tool T provided with a credentials management program CMP<sub>P</sub> enabling a security administrator to initialize the credentials relative to a user for a given application in the file F of the server supporting the application concerned and in the personal security device PSD intended for the user. This means that, in addition to the initial credentials, the personal identification code PIN is loaded into the device PSD by means of the personalization tool T. The credentials of the user for the application concerned can instead be initialized or updated directly by the security administrator, using standard administration tools provided for defining the rights of the user vis-à-vis the application.

15

In a second phase the device PSD and the associated PIN code are sent back to the user via separate channels, as is standard practice, in particular with smart cards.

20

The user then connects their device PSD to their terminal T and loads the application DD into their terminal.

To access an application, the user launches the application DD, enters their PIN code to enable access to the device PSD and then, using the application DD, and as previously described with reference to Figure 5, enters into the program ACC the credentials read in the device PSD by a Drag-and-Drop operation using a mouse.

25

Otherwise, the credentials are updated periodically as described with reference to Figure 5.

Note that the initialization and personalization process could instead be implemented in the case of a hardware and software architecture like that described with reference to Figure 2, i.e. in the situation where the credentials management program is an integral part of the client-end application ACC<sub>M</sub> and the server-end application ACS.

30

Figure 8 shows a variant of the initialization and personalization process shown in Figure 7.

In Figure 8, the credentials of the users are generated by a personalization tool under the control of a security administrator and are stored, for each user, in an initial credentials file K associated with the credentials management module CMS. The security administrator supplies the user with a blank device PSD, i.e. a device containing no credentials. An initial authentication password, also stored in the file K, is transmitted to the user via a separate channel.

The user connects the device PSD they have received to the terminal T and if necessary installs the application DD. The user also allocates their device PSD a personal identification number PIN. The user then connects to the credentials management module CMS by means of the application DD and authenticates themselves vis-à-vis that software by entering the initial authentication password communicated to them. Once the user has been authenticated, the module CMS loads into the application DD the initial credentials stored for the user concerned in the file K. The initial credentials are transferred by the application DD into the device PSD, in which they are stored. In parallel with this, the initial credentials of the user are loaded by the module CMS into the file F, or updated in that file if the user was already accredited for the application concerned.

Then, as described with reference to Figures 5 to 7, all the user has to do to authenticate themselves vis-à-vis the application is enter their PIN code and then load the credentials read by the application DD in the device PSD into the program ACC, using the application DD. Of course, as in the previous embodiments, when loading the credentials by means of a Drag-and-Drop operation using the mouse and the application DD, the credentials are not displayed on the screen of the terminal and are therefore not known to the user.

After initialization and personalization, the credentials are updated as described with reference to Figures 5 and 7.

Figure 9 shows a second embodiment of the invention in which the application is executed entirely locally in the terminal T by means of an application LA loaded into the terminal. In this case the credentials file F is stored in the terminal T. The credentials management program CMP is also executed locally and forms part of the Drag-and-Drop application DD. The program CMP has direct access to the personal security device PSD and can access the file F either directly, as shown, or via the application LA.

Initially, the security administrator supplies the user with a blank device PSD containing no credentials.

The user connects their device PSD to their terminal T, loads the application DD and assigns a personal identification code PIN to their device PSD.

5       The application DD needs the old credentials of the user for the application LA for authenticating the user. The application DD generates new credentials which are loaded into the device PSD and replace the old credentials in the file F, either directly or via the application LA.

10       To access the application LA, all that the user then has to do is launch the application DD, enter their PIN code enabling access to the device PSD and load the credentials into the application LA by means of a Drag-and-Drop operation, as described with reference to Figures 5, 7 and 8. It must again be understood that the credentials are not displayed on the screen during this operation and consequently remain unknown to the user.

15       The process of updating the credentials in the context of the data processing system shown in Figure 9 is illustrated by the Figure 10 flowchart.

      Having requested access to the application DD in step 41a, the user enters their PIN code into the terminal T in step 41b and the code is transmitted to the device PSD, which in step 42 compares it with the PIN code stored in it (43). If they do not match, the request is rejected (step 44).

20       If they do match, the application DD initiates a process for updating the credentials for application X (step 45). To this end, it reads the credentials stored for application X in file F (step 46) and those stored for the same application X in the device PSD (step 47). The credentials are compared (step 48) and modification of the credentials is refused (step 49) if they do not match.

25       If they do match, the application DD generates new credentials for application X (step 50) which are stored in the file F (step 51) and in the device PSD (step 52).

30       If the terminal T is equipped with software for several applications X, Y, etc., a new process of updating the credentials for application Y is initiated in step 53, and the same process is repeated for all the applications.

It follows from the foregoing description that the system described can authenticate users by means of static credentials and in particular a static password, which credentials remain unknown to the user. The user therefore does not need to

remember a password and is therefore not tempted to write their password down anywhere so that they do not forget it.

The static password can be complex and of the maximum length compatible with the application concerned, given that the user does not need to memorize it or enter it into their terminal.

What is more, the static password is periodically updated automatically, i.e. not subject to the discretion of the user. The "strong" and periodically renewed static password is stored in a security device which is personal to the user, of the smart card or similar type or of the purely software type, which offers a very high level of protection against illegitimate attempts to read the data contained therein.

Finally, to access an application, the system described does not require real time connection of the terminal to any server other than that on which the application may be partly executed. Although in the embodiments shown in Figures 5, 7 and 8 the credentials management module CMS can be installed on a server independent of that in which the application is partly executed, it nevertheless remains a fact that the connection to the independent server is not necessary for accessing the application. The system described is therefore fundamentally different from password server systems.

Also, the system described does not entail any modification of existing servers, the only modifications needed concerning the software to be installed on the terminal(s). The data processing system described therefore considerably strengthens the security of existing systems using authentication by static credentials to access one or more applications.

It goes without saying that the embodiments described are merely examples which can be modified, in particular by substitution of technical equivalents, without departing from the scope of the invention. For example, the credentials could be updated, not as described on the occasion of each access to an application or after a predetermined time period has elapsed, but as a function of a number of events. A counter can be incremented on each authentication request or on each access to the credentials. At the time of each authentication request or of each access to the credentials, the content of the counter is compared with a threshold value and the credentials are modified if the threshold value has been reached. The threshold can be chosen so that the credentials are updated at the time of each successful authentication in relation to an application, as described with reference to Figure 6.

5

**CLAIMS**

1. A data processing system for executing at least one program to which access by a user is controlled by the provision of credentials assigned to said user, said system including:

5       - at least one terminal including data processing means for executing at least part of said program,

      - first memory means associated with said program for storing at least first credentials specific to said user, and

10       - access control means for authorizing access to said program in response to a match between said first credentials stored in said first memory means and second credentials applied via said terminal to said program,

      -at least one security device personal to said user, associated with said terminal and including second memory means for secure storage of said second credentials,

15       -said terminal including at least some of credentials management means (CMP) including:

- means for reading and transmitting credentials to read said second credentials stored in said second memory means and transmit them to said access control means in response to presentation of a request to access said program, and
- credentials updating means for selectively commanding the generation and loading into said first and second memory means of new credentials replacing said first and second credentials previously stored.

20       2. A system according to claim 1, wherein said access control means authorize access to said program in response to identity of said first and second credentials.

25       3. A system according to claim 1, wherein said second memory means store a first identification code of said user, said terminal includes interface means for applying a second identification code to said personal security device and said personal security device comprises identification code validation means, access to said personal security device being authorized by said validation means in response to identity of said first and second identification codes.

30

4. A system according to claim 1, wherein said credentials updating means comprises generating means to generate said new credentials automatically and to transmit them directly to said first and second memory means without communicating said new credentials to said user.

5 5. A system according to claim 1, wherein said credentials management means are software means forming part of said program.

6. A system according to claim 5, wherein said credentials updating means comprises generating means to generate and load said new credentials into said first and second memory means consecutively upon authorization of access by said  
10 access control means.

7. A system according to claim 6, wherein said credentials management means include dating means for dating and loading into at least one of said memory means the date at which said credentials are generated and inhibitor means for authorizing generation of said new credentials by said updating means only after a particular time has elapsed since the generation of said credentials stored in said memory means.  
15

8. A system according to claims 1, wherein said credentials management means are software means independent of said program.

9. A system according to claim 3, wherein said credentials management means are software means independent of said program and said credentials  
20 updating means comprises generating means to generate and load said new credentials into said first and second memory means consecutively upon validation of said identification code by said validation means.

10. A system according to either claim 9, wherein said credentials management means include dating means for dating and loading into at least one of  
25 said memory means the date at which said credentials are generated and inhibitor means for authorizing generation of said new credentials by said updating means only after a particular time has elapsed since the generation of said credentials stored in said memory means.

11. A system according to claim 1, wherein said program is stored and  
30 executed wholly within said terminal for local execution of said application.

12. A system according to claim 1, wherein said system includes at least one server and transmission means for transmitting data between said terminal and said server, said program is stored and executed partly in said terminal and partly in said server, and said first memory means are associated with said server.




**TITLE** : Data processing system for application to access by accreditation.

**ABSTRACT OF THE DISCLOSURE**

This system for executing a program to which access by a user is controlled by credentials includes a terminal (T), first memory means (F) associated with said program for storing at least first credentials specific to said user, access control means for authorizing access to said program in response to a match between said first credentials and second credentials applied via said terminal, and a security device (PSD) personal to said user, associated with said terminal and including second memory means (M) for secure storage of said second credentials. The terminal (T) includes at least some of credentials management means (CMP) including means for reading said second credentials and transmitting them to said access control means in response to presentation of a request to access said program, and credentials updating means for selectively commanding the generation and loading into said first and second memory means (F, M) of new credentials replacing the credentials previously stored.

**FIGURE 1**

FIG. 1

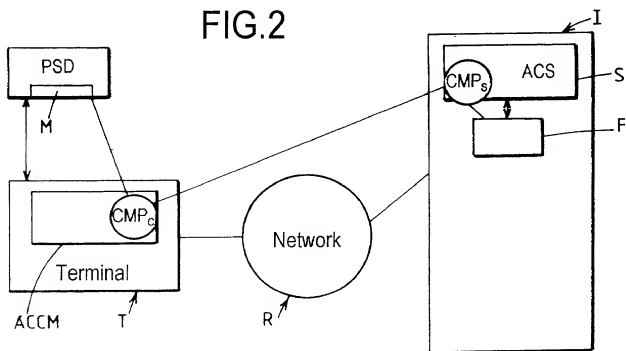

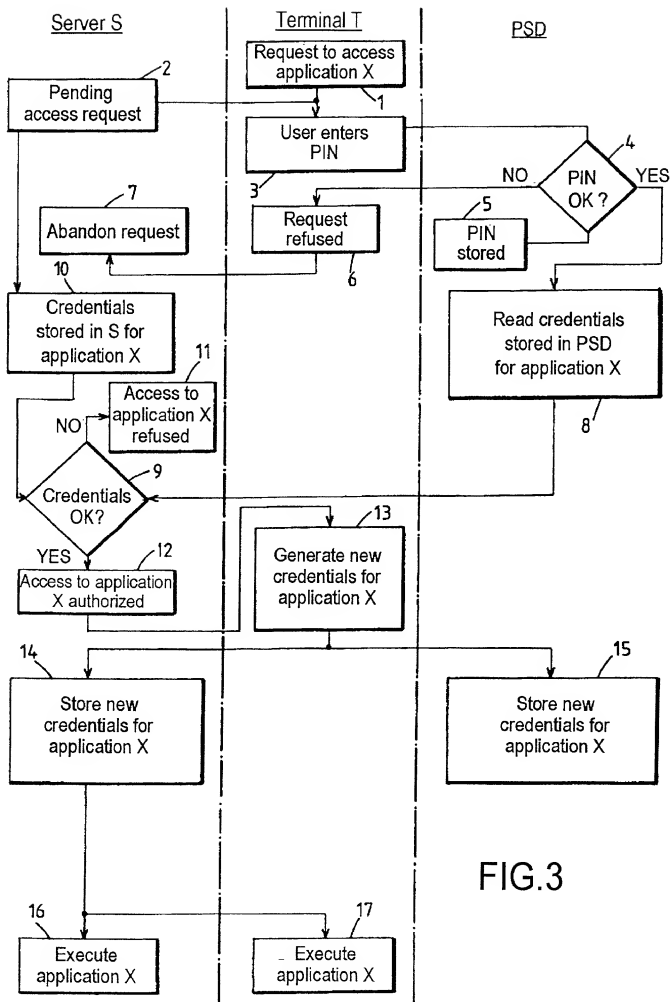


FIG.3

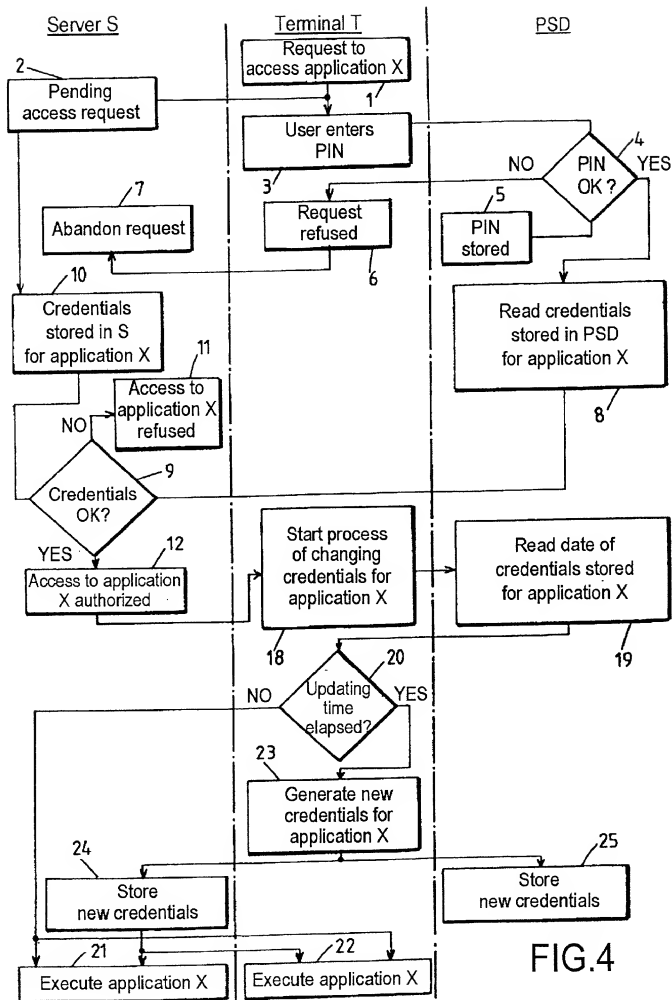


FIG.4

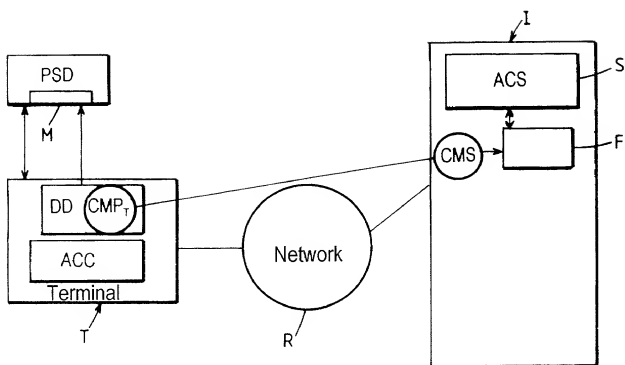


FIG.5

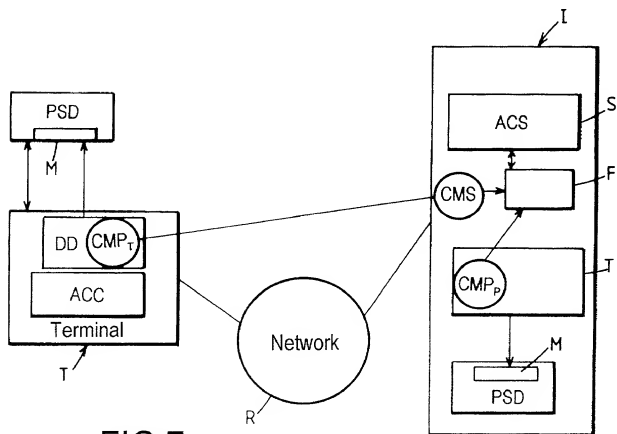


FIG.7

Server CMS

Terminal T

PSD

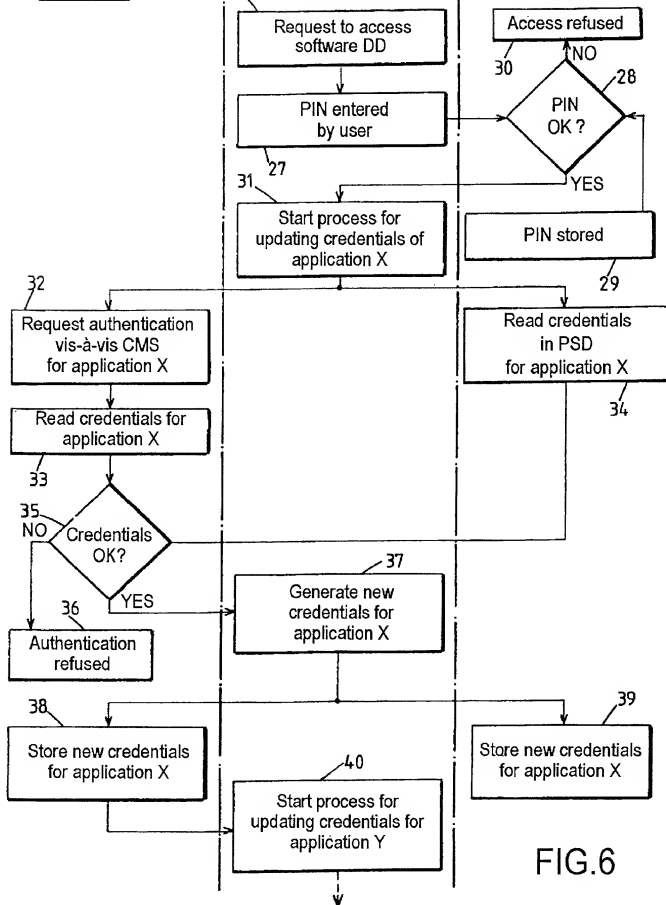
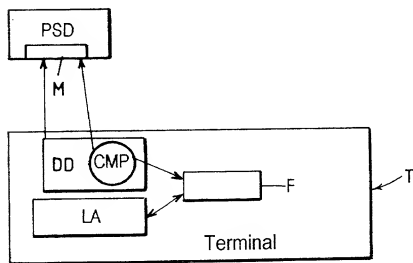
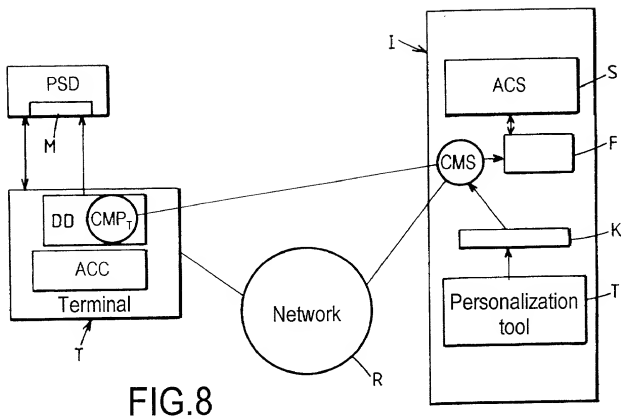


FIG.6



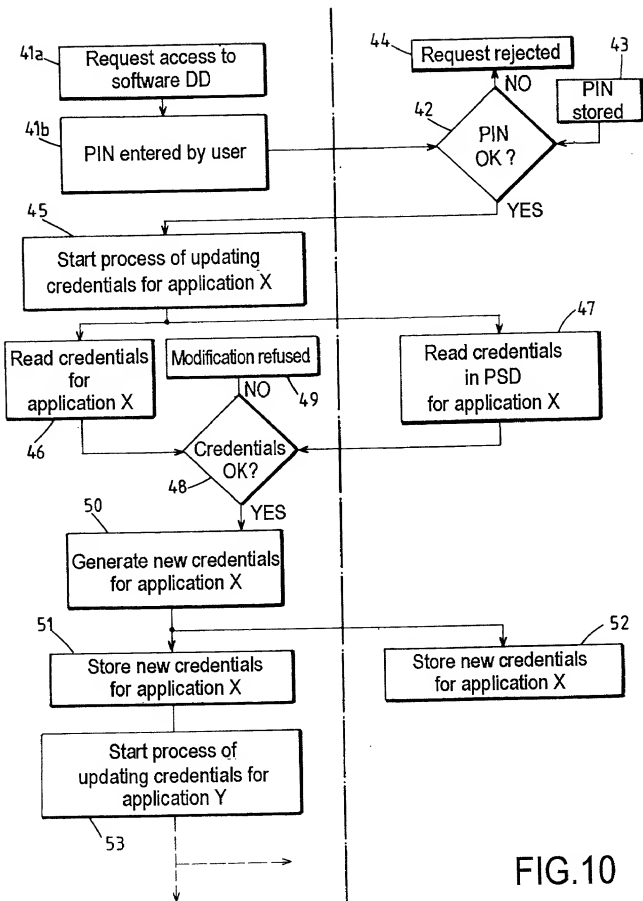


FIG.10



**APPLICATION FOR UNITED STATES PATENT**  
**Declaration for Patent Application**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: 1 "Data processing system for application to access by accreditation".  
the specification of which (check at least one) 2 (file no. \_\_\_\_\_)

3 ☒ is attached hereto

4 ☐ was filed on \_\_\_\_\_ as (5) U.S. Application Serial No. \_\_\_\_\_

6 ☐ and was amended on \_\_\_\_\_

(if applicable)

Use this portion only if you are entering the U.S. National phase based on a PCT International Application designating the U.S.	7 <input type="checkbox"/>	was filed as PCT international application
	8	Number _____
	9	on _____
	10	and was amended under PCT Article(s) 19 and/or 34 _____
		(if applicable)

I hereby declare that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended, by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me which is material to patentability in accordance with Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 or 365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date earlier than that of the application(s) on which priority is claimed.

Prior (Foreign) Application(s) any Priority Claims Under 35 U.S.C. 119 or 365 Priority Claimed

<u>FRANCE</u>	<u>99 15980</u>	<u>17 DECEMBER 1999</u>	<input checked="" type="checkbox"/> <input type="checkbox"/>
(Country)	(Number)	(Day/Month/Year Filed)	Yes No
_____	_____	_____	<input type="checkbox"/> <input type="checkbox"/>
(Country)	(Number)	(Day/Month/Year Filed)	Yes No
_____	_____	_____	<input type="checkbox"/> <input type="checkbox"/>
(Country)	(Number)	(Day/Month/Year Filed)	Yes No

☐ Additional foreign application numbers are listed on a supplemental priority data sheet attached hereto.

Priority Claim(s) from U.S. Provisional Application(s) - I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

Application No. _____	Day/Month/Year Filed _____	Application No. _____	Day/Month/Year Filed _____
<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet attached hereto.			

Do not use this portion to identify a PCT application if the parent application is the U.S. National phase of the PCT application	I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) or under Title 35, United States Code, 365 of any PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between filing date of the prior application and the national or PCT international filing date of this application.		
	12 _____	_____	
	(U.S. Parent Application or PCT Parent Number)	(Parent Filing Date)	Status (patented, pending, abandoned)
	<input type="checkbox"/> Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet attached hereto.		

I hereby appoint the following attorneys of the firm of Stevens, Davis, Miller & Mosher, L.L.P. as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office: James E. Ledbetter, Reg. No. 28732; Thomas P. Pavelko, Reg. No. 31689; and Anthony P. Venturino, Reg. No. 31674.


ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO STEVENS, DAVIS, MILLER & MOSHER, L.L.P., 1615 L Street, N.W., Suite 850, Washington, D.C. 20036, TELEPHONE (202) 408-5100, FACSIMILE (202) 408-5200.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful statements may jeopardize the validity of the application or any patent issuing thereon.

13a	Typewritten Full Name of Sole or First Inventor		<u>AUDEBERT</u>	<u>Yves</u>	
			Given Name	Middle Name	Family Name
14a	Inventor's Signature	A	<u>Yves Audibert</u>		
15a	Date of Signature	A	<u>10</u>	<u>16</u>	<u>2000</u>
			Month	Day	Year
16a	Residence		<u>237 Forrester Road - CA 95032 LOS GATOS - U.S.A.</u>		
17a	Citizenship		<u>French</u>		
18a	Post Office Address (Insert complete mailing address, including country)		<u>237 Forrester Road - CA 95032 LOS GATOS - U.S.A.</u>		
13b	Typewritten Full Name of Sole or Second Inventor				
			Given Name	Middle Name	Family Name
14b	Inventor's Signature	A			
15b	Date of Signature	A			
			Month	Day	Year
16b	Residence				
			City	State or Province	Country
17b	Citizenship				
18b	Post Office Address (Insert complete mailing address, including country)				
13c	Typewritten Full Name of Sole or Third Inventor				
			Given Name	Middle Name	Family Name
14c	Inventor's Signature	A			
15c	Date of Signature	A			
			Month	Day	Year
16c	Residence				
			City	State or Province	Country
17c	Citizenship				
18c	Post Office Address (Insert complete mailing address, including country)				

# United States Patent & Trademark Office

Office of Initial Patent Examination -- Scanning Division



SCANNED.# 4

Application deficiencies were found during scanning:

☒ Page(s) 4 of 4 of Transmittal were not present  
for scanning. (Document title)

*There are 2 sheets of 3 of 4*

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Scanned copy is best available.